


TXr Series

RFID
BARCODE LABEL
PRINTER



RUGGED
PARTS
DURABLE
MACHINES
RFID
ENCODING
& PRINTING

Precise positioning
allows super small
labels' R/W



ACHIEVE TOP PERFORMANCE WITH INNOVATION IN RFID PRINTER

The innovative structural design and utility functions of RFID printing technologies make the TXr Series printer an outstanding choice for RFID printing solutions, allowing great productivity and convenience increase for various UHF RFID printing needs.

Original RFID antenna technique that's Reading/Writing RFID tags after printing, helps you to recognize every single bad label, which provides a reliable solution for automatic sorting process or system. And it offers high compatibility, brilliant print quality in a variety of tags with a minimum inlay space of 12mm or attachable to metal objects that refers to RFID anti-metal tags, which can cover a broad range of printing needs and helps your business save on related cost.

Innovative antenna
module design
R/W after thermal
printing



RFID anti-metal
tag's R/W and
printing



BENEFITS

Original RFID antenna technique that's Reading/Writing RFID tags after printing, helps you to recognize every single bad labels and then reprinting, which ensures reliable process for automatic sorting system by excluding bad tags.

Enable the antenna to precisely detect tag and optimum writing position that can read and write RFID tags with the minimum inlay space of 12mm, as well as support RFID anti-metal tags' R/W and printing, which brings great compatibility to various applications and solutions.

Correctly finds the antenna position and the optimum writing position for RFID tags by just one button press.

Supports on various types of labels, and not wasting the first label – A great saving!

Intellectually finds
the antenna
position by one
button press




SPECIFICATIONS

Model	TX2r	TX3r	TX6r
Printing Mode	Direct Thermal and Thermal Transfer		
RFID	Integrated UHF Reader/ Encoder, EPC Gen 2 Class 1/ ISO 18000-6C		
Printing Resolution	203 dpi	300 dpi	600 dpi
Max Printing Speed	10 ips (254 mm/s)	8 ips (203.2 mm/s)	6 ips (152.4 mm/s)
Max Printing Width	4.09" (104 mm)	4.17" (106 mm)	4.16" (105.6 mm)
Max Printing Length	157" (4000 mm)	79" (2000 mm)	19.6" (500 mm)
HEAT™ Level	II	I	I
Media	Width: 4.56" (116 mm) max., 0.39" (10 mm) min. OD: 7.3" (186 mm) max., ID: 3" (76.2mm) min, as standard; 1.5" (38 mm) min, is factory dependent		
Media Thickness	0.0024" (0.06 mm) ~ 0.012" (0.305 mm), including liner		
Media Thickness (On-metal)	0.047" (1.2 mm) max., including liner.		
Ribbon	Width: 4.65" (118 mm), Length: 1968' (600 m), OD: 3.3" (84 mm) max., ID: 1" (25.4 mm) min.; Ink side: both In and Out.		
Memory	8 MB FLASH ROM, 16 MB SDRAM		
Media Sensor	Upper & Lower Reflective (Adjustable) / Transmissive (Adjustable)		
Fonts	Five built-in dot matrix ASCII fonts, user-downloadable TrueType Fonts		
Bar Code Types	1D Barcode: Code 39, Code 93, Code 128/subset A, B, C, Codabar, Interleave 2 of 5, UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128, etc. 2D Barcode: MaxiCode, PDF417, Data Matrix, QR Code, etc.		
Interfaces	RS-232 Serial, 10/100 M Adaptive Ethernet, USB DEVICE 2.0, USB HOST, Centronics Parallel		
LCD Display	Graphic Dot Matrix		
Power Source	100 ~ 240 V, 50/60 Hz, 3.5 A		
Weight	33.06 lbs (15 kgs)		
Dimensions	W 11.3" (286 mm) x D 17.6" (448 mm) x H 10.7" (271 mm)		
Operating Environment	Temperature: 32°F ~ +104°F (0°C ~ 40°C), Relative humidity: 5% ~ 85% non condensing		
Storage Environment	Temperature: -40°F ~ +140°F (-40°C ~ 60°C), Relative humidity: 5% ~ 85% non condensing		
Optional Items	Rotary Cutter, External Label Rewinder		

APPLICATIONS

- Automobile Manufacturing
- Consumer Goods
- Financial Services
- Retail Store Operations
- Logistics & Warehousing
- Asset Management

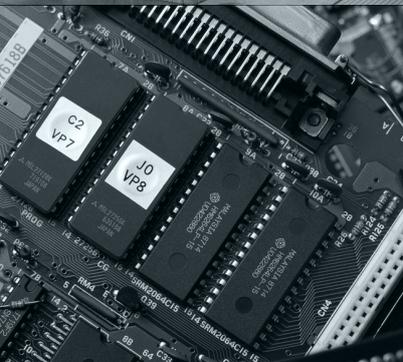

* HEAT™, Heating Equilibrium Adaptive Tuning, newly developed by POSTEK, is a cutting edge technology in heating control of thermal print-heads. With HEAT™, the POSTEK printers can significantly improve their performance in the aspects of printout clarity and print speed. The HEAT™ level represents the fineness of the heating uniformity with level I being the finest.

* All specifications are subject to change without notice.

SAMPLES

\$16.99

090|01|1404

SUNGLASSES

F16938893 Q1/10 CATS GRADLE-BK

ID180478_MA10_16802_L Dist. by Target Corp.,
Mpls., MN55408 ©2010 Target Brands, Inc
All Rights Reserved Shop Targetcom

Made in China B00000

4 90900 11404 2

RFID inside

EU €
US \$
UK £
CA \$
DK kr
SE kr
NO kr
CH str

Unverbindliche Preisempfehlung
unbinding price recommendation
prix conseillé
vegljedende udsalgspris
vrijlijvend adviesprijs
dijvenvrij advies
ikke-bindende forslag
preço recomendado
prezzo consigliato

D
UK
I
US
F
MX

www.postek.com.cn

POSTEK Electronics Co., LTD.
James Bond Director 617-510-6691

2 300010000000000000240

Patent Pending. POSTEK Electronics Co., LTD. Shenzhen China

POSTEK

POSTEK ELECTRONICS CO., LTD.

Wisdom Plaza, Block B, Tower 2, 18th Floor
Qiaoxiang Road, Nanshan District, Shen Zhen,
Guang Dong, China

T +86-755-83240988
F +86-755-83202898

WWW.POSTEKCHINA.COM