


BULLSEYE

The best performing small CD and DVD product for library and rental applications.



Overview

Operating Frequency
13.56 MHz

Integrated Circuit (IC)
NXP ICode SLIX

Antenna Size
Ø 33 mm (1.30 in)

Die-cut Size
Ø 40 mm (1.58 in)

International Standards
ISO 15693
ISO 18000-3 Mode 1

Quality Assurance
100% performance tested

Application Areas

- Library and Media Management

BullsEye tags and inlays are best in class small hub tags for CDs, DVDs, library and rental applications. BullsEye products are small sized products with an extended read range. BullsEye tags and inlays have an industry proven hub design and easy application with strong adhesive.

BullsEye tags and inlays have NXP SLIX ICs with EAS, stack reading capability and 1k bit memory.


Benefits:

- Excellent performance in media management and library applications.
- Small sized product with extended read range.
- Industry proven hub design with strong adhesive.
- ISO 9001:2008 Quality Management System and ISO 14001:2004 Environment Management System support.

BULLSEYE

Technical Features	
IC	NXP ICode SLIX
Memory	1k bit
Frequency	13.56 MHz
Antenna Size	Ø 33 mm / 1.30"
Die-cut Size	Ø 40 mm / 1.58"
Web Width	48 mm / 1.89"
Operating Temperature	-40°C to 85°C / -40°F to 185°F
Bending Diameter (D)	> 50 mm, tension max. 10 N
Delivery Formats	Dry naked inlay, wet inlay, tag
Adhesive	Permanent pressure sensitive adhesive
Adhesive Usage Temperature	min. -10°C to 90°C / min. 14°F to 194°F
Qty/Reel	2,000 per reel
Core Size	76 mm / 3"
Shelf Life: minimum of 2 years from the date of manufacture in	20°C / 68°F, 50% RH

SMARTRAC TECHNOLOGY GROUP uses three different qualification methods to evaluate the quality and reliability of RFID inlay and tag products. Products are tested according to IEC 60068-2-67 (temperature and humidity), JEESD22-A104-B (temperature cycling) and an in-house developed bending test.

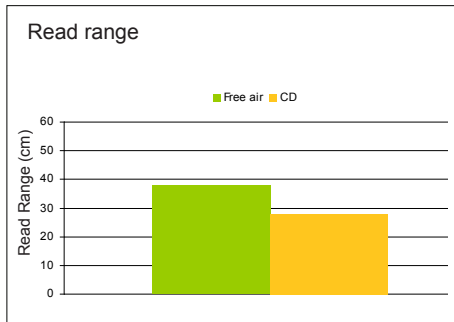

All the graphs are indicative: performance in real life applications may vary.



RoHS 

For further information, please contact our sales representatives:

Sales Europe

SMARTRAC TECHNOLOGY GROUP
Hanauer Landstrasse 291a
60314 Frankfurt am Main
Germany
Tel. +49 69 904 3579 1011
Fax +49 69 904 3579 1015
sales.emea@smartrac-group.com

Sales Americas

SMARTRAC TECHNOLOGY Fletcher Inc.
267 Cane Creek Road
Fletcher, NC 28732
United States of America
Tel. +1 866 901 7343
Fax +1 828 651 6063
sales.americas@smartrac-group.com

Sales APAC

SMARTRAC TECHNOLOGY PTE. Ltd.
SINGAPORE
6 Greenleaf Walk
Amsterdam Building 2-8
Singapore 279226
Tel. +60 4 489 36-0
Fax +60 4 489 36-50
sales.apac@smartrac-group.com