

Touch POS Terminal


(Simple Operating Manual)



2204099

Reading First

Your touch POS terminal package is included with components as follows:



Touch POS Terminal



User's Manual



AC power cable



Driving disk



AC Adapter

Optional accessories



MSR/Dallas Key




Customer display screen



Secondly display screen


Install MSR and ibutton (Optional)



Remove interface cover




Connect MSR/ibutton port to host port




Install MSR/ibutton module to terminal and fix it screws

Power ON/OFF



Power button is on the back of the LOGO






To hide the power cable:

- 1.Remove rear cover
- 2.Place power cable through the cable hole on the base
- 3.Install rear cover

POWER ON: Connect the power cable correctly and press the power button.

POWER OFF: Click shut down in OS, or press the power button to shut down.

I/O Description

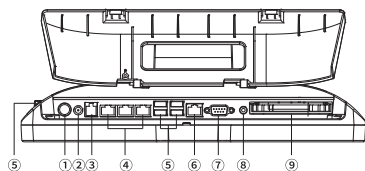


- 1.24V DC IN
- 2.12V DC OUT
- 3.Cash Drawer
- 4.COM (RS232)
- 5.USB
- 6.LAN
- 7.VGA
- 8.Audio
- 9.HDD/SSD (Optional)


Install the 2nd Screen (Optional)



Remove the switch cover for the 2nd screen (unscrew the screws on the top of base, can remove it)



Place cables through the cable hole on the base and the top of base (original location of switch cover)



Intall the 2nd Screen (mind the cables) and the cover




Connect the cables

Adjust screen view angle



Hold left and right sides and adjust view angle while terminal without MSR and iButton.




Hold top and bottom sides and adjust view angle while terminal with MSR and iButton.


Replace HDD/SSD (Optional)




Open interface cover



Remove HDD/SSD when terminal is off



Replace HDD/SSD after releasing 2 screws on both sides



Mind HDD/SSD direction while installation