



SHORTDIPOLE

Excellent Global Performance on Various Materials

SMARTRAC SHORTDIPOLE inlays and tags are designed and optimized for global retail, industry and supply chain applications, offer excellent global performance also on lower detuning materials like cardboard and plastic.

SHORTDIPOLE inlays and tags are a size-optimized 100 mm / 4 inch form factor, making them suitable for use with a wide range of supply chain labels.

They are available with the Impinj Monza 5 chip that is approved for retail and apparel solutions by RFID Research Center of University of Auburn for the categories A,B, C, D, F, G, K, I, M, N and Q. Furthermore SHORTDIPOLE with Impinj Monza 5 is tested to meet GS1 Tagged-Item Performance Protocol (TIPP) Tagged-Item Gratings M10B and S10B, M15B and S15B as well as M20D and S15B for the retail supply chain, retailers and suppliers.

SMARTRAC's inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, enhancing RFID usage for difficult-to-tag materials.

Overview

Operating Frequency

860 - 960 MHz

Integrated Circuit (IC)

Impinj Monza 5

Antenna Size

93 x 11 mm (3.6 x 0.4 in)

Die-cut Size

97 x 15 mm (3.8 x 0.6 in)

International Standards

- ▶ EPC Class 1 Gen 2
- ISO 18000-6C

Application Areas


- ▶ Brand Protection
- ▶ Retail
- ▶ Industry
- ▶ Sports Timing
- ▶ Supply Chain Management

SHORTDIPOLE

Excellent Global Performance on Various Materials

Technical Features			
IC + Memory	Size	Format*	Sales Code
Impinj Monza 5	93 x 11 mm / 3.7 x 0.4 in	Dry	3001997
128 bit EPC	97 x 15 mm / 3.8 x 0.6 in	Wet	3001998
Web Width	100 mm / 3.9 in		
Operating Temperature	-40 °C to +85 °C / -40 °F to +185 °F		
Adhesive	Acrylic, water borne adhesive		
Qty/Reel	20,000 pcs		
Core Size	76 mm / 3 in		
Shelf Life	+20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing		

*Note: Other formats are available upon request.

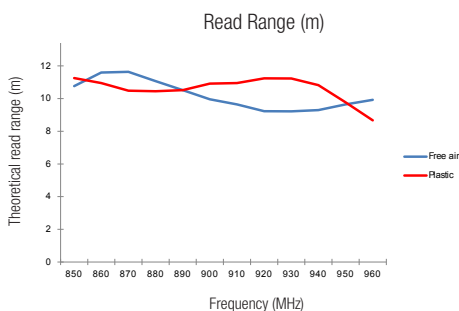

All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a 2W ERP output power level.

SMARTRAC N.V. · Strawinskylaan 851 · 1077 XX Amsterdam · The Netherlands

Phone: +31 20 30 50 150 · Fax: +31 20 30 50 155 · info@smartrac-group.com

Contact: Sales & Customer Service

www.smartrac-group.com/contact



© 2017 SMARTRAC N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

